


## Model UBY Combination Ball Valve & Strainer (1/2" - 2")

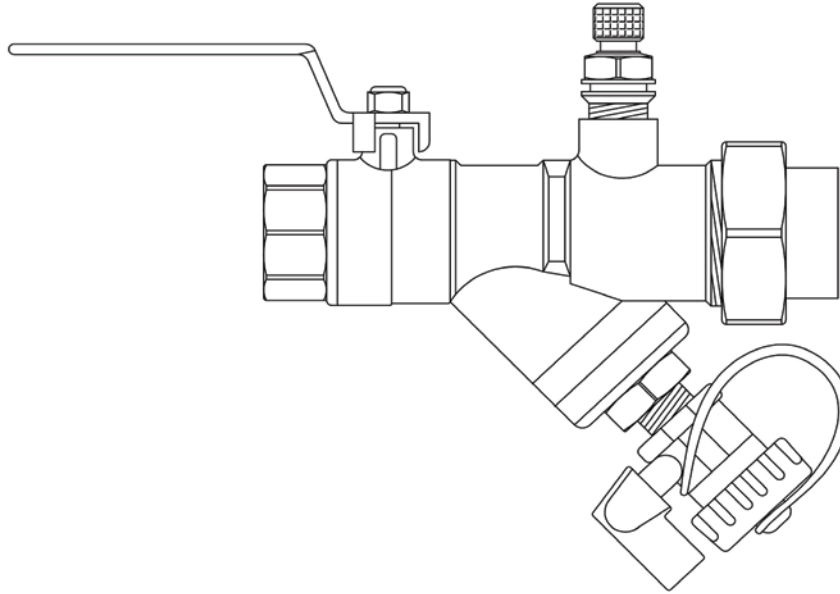


Model UBY Combination Ball Valve & Strainer

<b>Body:</b>	Brass C37000
<b>Ball:</b>	Full Port Chrome Plated
<b>Ball Seal:</b>	Teflon®
<b>Stem:</b>	Explosion Proof
<b>O-Rings:</b>	EPDM
<b>Strainer:</b>	20 Mesh Stainless Steel
<b>Bypass Port Tap:</b>	1/2" NPTF for sizes 1/2", 3/4" and 1" 3/4" NPTF for sizes 1 1/4" and 1 1/2" 1" NPTF for 2"

<b>Maximum Working Pressure:</b>	400 psig
<b>Maximum Operating Temp:</b>	-4°F to 250°F

Note: For a 2-1/2" kit a 2" UBY is supplied with a 2 -1/2" NPT expanding coupler.

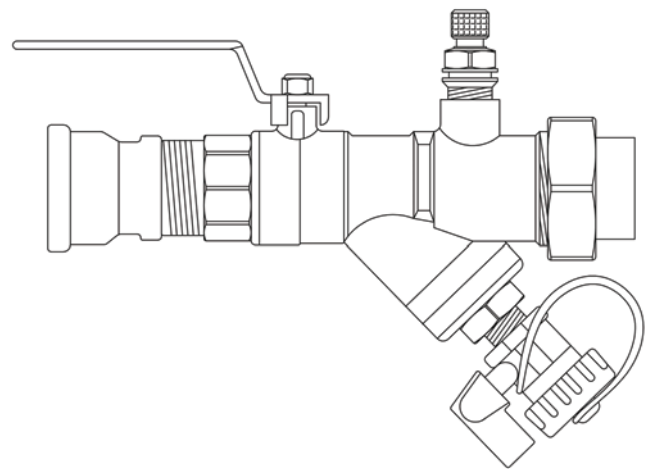

**WARNING:** To insure proper installation this product must be installed in conformance with applicable building codes. Use of proper torque wrench is required.